



VALMAN

VALVE MANUFACTURING


UNDERGROUND HYDRANT DN 50



Material: Ductile cast iron GJS

Protection: Fluidized bed epoxy powder coating

Nominal pressure: NP 10

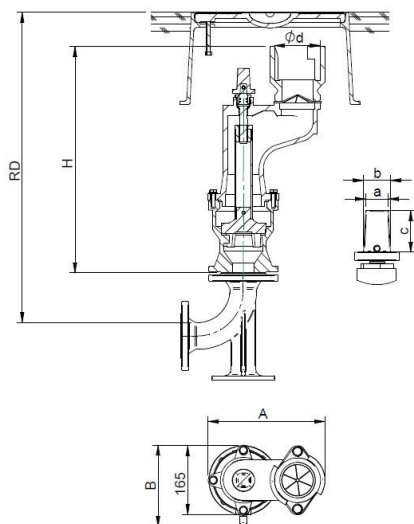

Code	DN	RD (mm)	Dimensions (mm)							Weight (kg)
			H	A	B	ød	Upper square			
							a	b	c	
2502901	50	750	540	280	195	110	27	32	50	24
2502902	50	1000	790							29
2502904	50	1250	1045							34
2502905	50	1500	1295							39

Technical data:

Underground hydrant in standard version has: wedge of ductile cast iron GJS complete rubberized, drain off system is automatic after every usage, wedge is so design according to seat of hydrant, so that provide flow of fluid in linear function. Claw connection is made according national standards which enable usage for standard underground hydrant outlet extension.