


ABOVE GROUND HYDRANT CASTED BODY DN80



Material: Ductile cast iron GJS

Protection: Fluidized bed epoxy powder coating

Nominal pressure: NP 10/16 bar

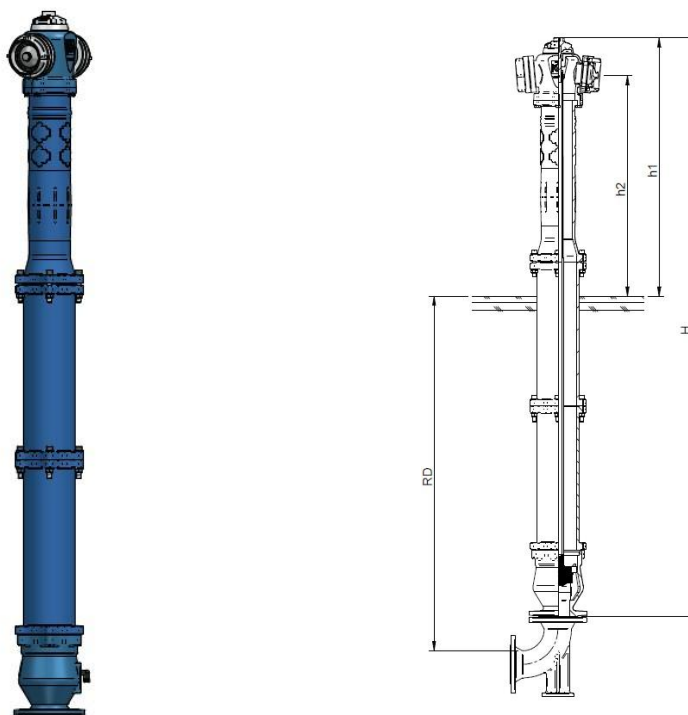

Code	DN	RD	Sockets			Hydrant body			Weight (kg)
			A	B	C	H (mm)	h1 (mm)	h2 (mm)	
2512301	80	1000	-	2	-	1795	920	790	70
2512201			-	1	2				72
2512302	80	1250	-	2	-	2045	920	790	76
2512202			-	1	2				78
2512303	80	1500	-	2	-	2295	920	790	82
2512203			-	1	2				84

Tehcnical data:

Above ground hydrant in standard version has: wedge of ductile cast iron GJS complete rubberized, with automatic inlet-outlet air valve. Drain off system is automatic after every usage, wedge is so design according to seat of hydrant, so that provide that flow of fluid is in linear function. Head cover is made according international standards which enable usage of standard operating keys for hydrants. According request of customers, we deliver hydrants with safety couplings (HAWLE couplings).