


ABOVE GROUND HYDRANT CASTED DN100

Material: Ductile cast iron GJS

Protection: Fluidized bed epoxy powder coating

Nominal pressure: NP 10/16 bar

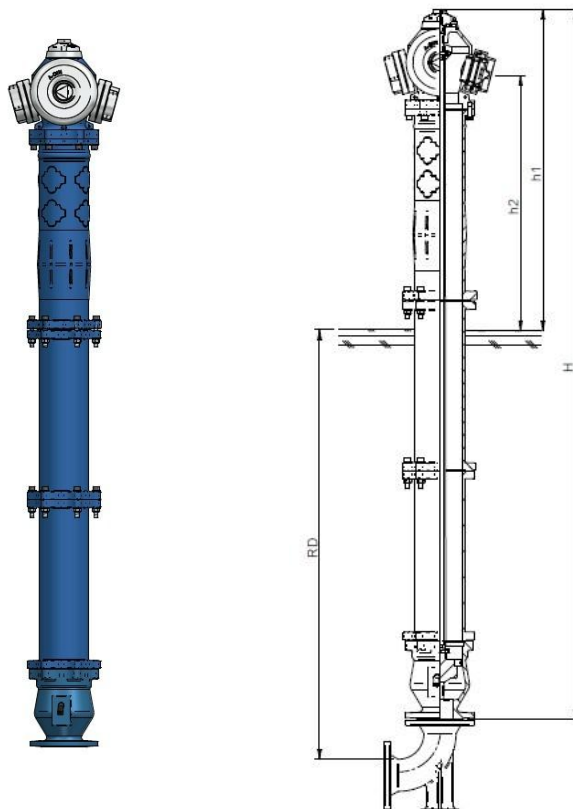

Code	DN	RD	Sockets			Hydrant body			Weight (kg)
			A	B	C	H (mm)	h1 (mm)	h2 (mm)	
2512401	100	1000	1	2	-	1870	1000	805	80
2512402	100	1250	1	2	-	2120	1000	805	88
2512403	100	1500	1	2	-	2370	1000	805	88

Tehcnical data:

Above ground hydrant in standard version has: wedge of ductile cast iron GJS complete rubberized, with automatic inlet-outlet air valve. Drain off system is automatic after every usage, wedge is so design according to seat of hydrant, so that provide that flow of fluid is in linear function. Head cover is made according international standards which enable usage of standard operating keys for hydrants. According request of customers, we deliver hydrants with safety couplings (HAWLE couplings).