





VALMAN

VALVE MANUFACTURING

UNIVERSAL DRILLING SADDLES



Material: Ductile cast iron GJS / Stainless steel
Protection: Fluidized bed epoxy powder coating
Nominal pressure: PN 10/16 bar

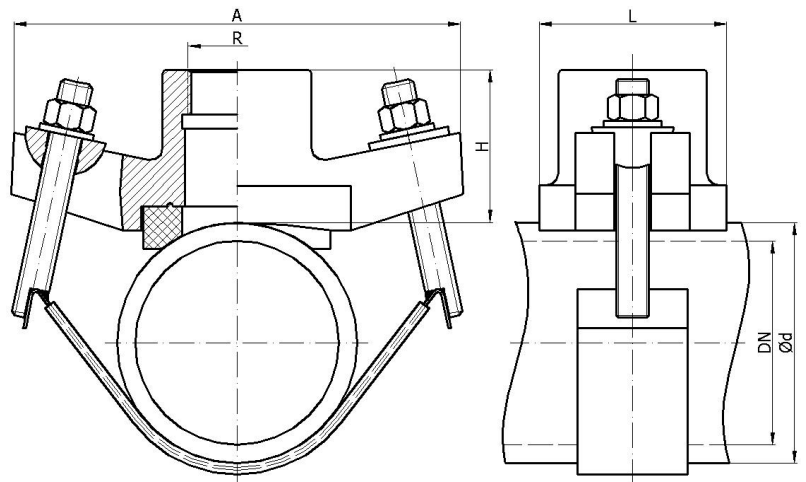

Technical data:

Drilling saddles with female thread and strap is used for water supply in individual houses connection in waterworks pipelines. The drilling saddles features outstanding sealing, easy maintenance and long life. It is used also for mounting on steel, DCI and AZ pipes. Dimensions of drilling saddles are calibrated to the outside pipe diameter of steel, DCI and AZ pipes. Sealing of drilling saddle made from EPDM (NBR) rubber with two o-ring. All drilling saddles has strap of stainless steel with rubber from inside.



VALMAN

VALVE MANUFACTURING

Code	PN (bar)	DN	Ød _{min} (mm)	Ød _{max} (mm)	L _t (mm)	H	A	L
2200601T	10	50	66	70	140	72	212	92
2200602T	10	80	88.9	104	245	72	212	92
2200603T	10	100	110	130	280	72	212	92
2200604T	10	125	140	165	370	72	212	92
2200605T	10	150	160	190	430	72	212	92
2200606T	10	200	219.1	252	590	72	212	92
2200607T	10	250	273	308	750	72	212	92
2200608T	10	300	315	342	860	72	212	92
2200609T			342	368	950			
2200610T	10	350	355	378	960	72	212	92
2200611T			378	404	1040			
2200612T			404	428	1120			
2200614T	10	400	400	429	1110	72	212	92
2200615T			429	456	1200			
2200615T			456	488	1285			
2200617T	10	500	500	532	1420	72	212	92
2200618T			544	568	1540			
2200619T			582	606	1650			

*R - threaded connection diameter (available in dimensions upon request: 1", 1 ¼", 1 ½" i 2")