


ABOVE GROUND HYDRANT TYPE NON BREAK AWAY



Material: Ductile cast iron GJS / Stainless steel
 Protection: Fluidized bed epoxy powder coating
 Nominal pressure: PN 10/16 bar

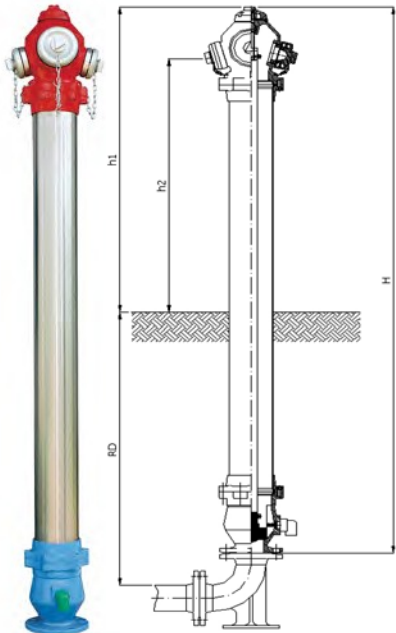

Code	DN	RD	Sockets			Hydrant body			Weigh t (kg)
			A	B	C	H (mm)	h1 (mm)	h2 (mm)	
2500001	80	1000	-	1	2	2000			48
2504001	80		-	2	-				
2500301	100		1	2	-				
2501110	100		-	2	-				
2500003	100		-	1	2				
2501201	80	1250	-	1	2	2250	1120	920	51
2501202	80		-	2	-				
2501203	100		1	2	-				
2501205	100		-	2	-				
2501204	100		-	1	2				
2501301	80	1500	-	1	2	2500			53
2501302	80		-	2	-				
2501303	100		1	2	-				
2501305	100		-	2	-				
2501304	100		-	1	2				

Technical data:

Above ground hydrant in standard version has: wedge of ductile cast iron GJS complete rubberized, with automatic inlet-outlet air valve. Drain off system is automatic after every usage, wedge is so design according to seat of hydrant, so that provide that flow of fluid is in linear function.

Head cover is made according international standards which enable usage of standard operating keys for hydrants.

According request of customers, we deliver hydrants with safety couplings (HAWLE couplings).