


ABOVE GROUND HYDRANT TYPE NON BREAK AWAY WITH ARM OF COAT



Material: Ductile cast iron GJS / Stainless Steel
 Protection: Fluidized bed epoxy powder coating
 Nominal pressure: PN 10/16 bar

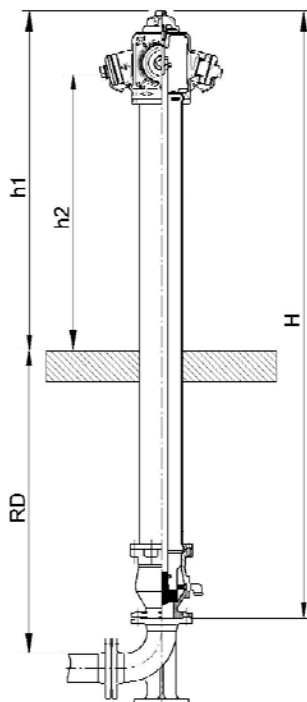

Code	DN	RD	Sockets			Hydrant body			Weight (kg)
			A	B	C	H (mm)	h1 (mm)	h2 (mm)	
2520001	80	1000	-	1	2	1985	1105	900	55
2540001	80		-	2	-		1105	900	
2530001	100		1	2	-	1995	1115	910	56
2550001	100	-	2	-	1115		910		
2520002	80	1250	-	1	2	2235	1355	1150	57
2540002	80		-	2	-		1355	1150	
2530001	100		1	2	-	2245	1365	1160	58
2550002	100		-	2	-		1365	1160	
2520003	80	1500	-	1	2	2485	1605	1400	60
2540003	80		-	2	-		1605	1400	
2530001	100		1	2	-	2495	1615	1410	61
2550003	100		-	2	-		1615	1410	

Technical data:

Above ground hydrant in standard version has: wedge of ductile cast iron GJS complete rubberized, with automatic inlet-outlet air valve. Drain off system is automatic after every usage, wedge is so design according to seat of hydrant, so that provide that flow of fluid is in linear function.

Head cover is made according international standards which enable usage of standard operating keys for hydrants.

According request of customers, we deliver hydrants with safety couplings (HAWLE couplings).