


## ABOVE GROUND INDICATOR OPENING OF VALVES



Material: Ductile cast iron GJS  
 Protection: Fluidized bed epoxy powder coating Nominal  
 pressure: PN 10/16 bar

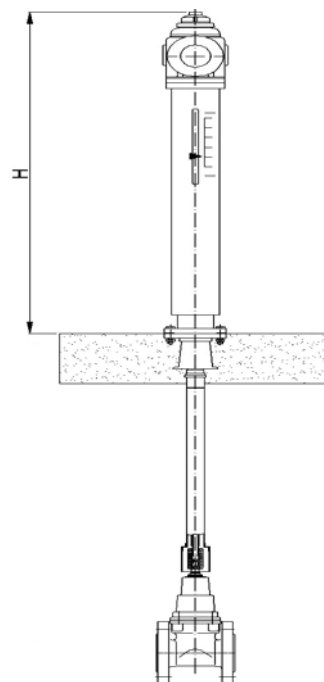

Code	DN	H (m)	Weight ( kg )
2501001	80	1,25	38
2501002	100	1,25	38
2501003	150	1,25	39
2501004	200	1,25	39

Technical data:  
 Above ground opening/closing of valves with mechanical position indicator for opening/closing of valve. For opening/closing use standard hydrant key. By customer request, we produce in bigger dimensions (up to DN 600).